


 **TECFRI**
SEGA

Action Fighter

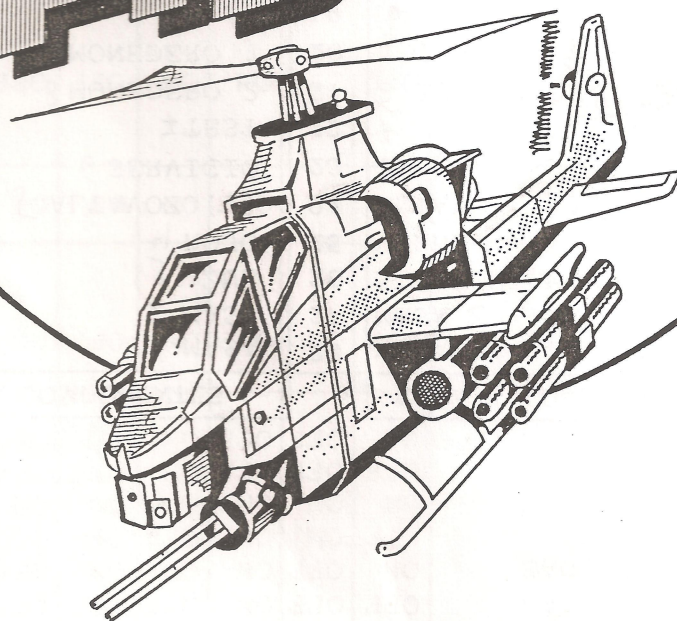

DIP SW 1

OPCIONES	1	2	3	4	5	6	7	8
1 MONEDA 1 PARTIDA	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1 MONEDA 2 PARTIDAS	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
1 MONEDA 3 PARTIDAS	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
1 MONEDA 4 PARTIDAS	ON	ON	OFF	OFF	ON	ON	OFF	OFF
1 MONEDA 5 PARTIDAS	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
1 MONEDA 6 PARTIDAS	ON	OFF	ON	OFF	ON	OFF	ON	OFF
2 MONEDAS 1 PARTIDA	OFF	ON	ON	OFF	OFF	ON	ON	OFF
3 MONEDAS 1 PARTIDA	ON	ON	ON	OFF	ON	ON	ON	OFF
4 MONEDAS 1 PARTIDA	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON
2 MONEDAS 3 PARTIDAS	ON	OFF	OFF	ON	ON	OFF	OFF	ON
2 MONEDAS 1 PARTIDA	OFF	ON	OFF	ON	OFF	ON	OFF	ON
4 MONEDAS 2 PARTIDAS								
5 MONEDAS 3 PARTIDAS								
6 MONEDAS 4 PARTIDAS								
2 MONEDAS 1 PARTIDA	ON	ON	OFF	ON	ON	ON	OFF	ON
4 MONEDAS 2 PARTIDAS								
1 MONEDA 1 PARTIDA	OFF	OFF	ON	ON	OFF	OFF	ON	ON
2 MONEDAS 2 PARTIDAS								
3 MONEDAS 3 PARTIDAS								
4 MONEDAS 4 PARTIDAS								
5 MONEDAS 6 PARTIDAS								
1 MONEDA 1 PARTIDA	ON	OFF	ON	ON	ON	OFF	ON	ON
2 MONEDAS 2 PARTIDAS								
3 MONEDAS 3 PARTIDAS								
4 MONEDAS 5 PARTIDAS								
1 MONEDA 1 PARTIDA	OFF	ON	ON	ON	OFF	ON	ON	ON
2 MONEDAS 3 PARTIDAS								
JUEGO LIBRE	ON	ON	ON	ON	ON	ON	ON	ON
MONEDERO SW 1					MONEDERO SW 2			

DIP SW 2

OPCIONES	1	2	3	4	5	6	7	8
MESA	OFF							
MUEBLE	ON							
EXHIBICION CON SONIDO		OFF						
" SIN SONIDO		ON						
3			OFF	OFF				
2			ON	OFF				
Nº DE MUÑECOS			OFF	ON				
4			ON	ON				
LIBRE								
COCHE					OFF			
BONOS					ON			
FACIL 1						OFF	OFF	
2						OFF	ON	
3						ON	OFF	
DIFICIL 4						ON	ON	
CONTINUACION	SI							OFF
	NO							ON

Action Fighter



CARA COMPONENTES		CARA SOLDADURA	
1 MASA	28	MASA 1	
2 MASA	27	MASA 2	
3 AZUL	26	SINCRONISMO 3	
4 ROJO	25	VERDE 4	
5 ALTAVOZ (+)	24	ALTAVOZ (-) 5	
6 SERVICIO	23	6	
7 TEST	22	7	
8 MONEDERO 2	21	2 JUGADORES 8	
9 MONEDERO 1	20	1 JUGADOR 9	
	10	10	
	11	11	
	12	12	
	13	13	
14 1 J IZQUIERDA	15	2 J IZQUIERDA 14	
15 1 J DERECHA	14	2 J DERECHA 15	
16 1 J ARRIBA	13	2 J ARRIBA 16	
17 1 J ABAJO	12	2 J ABAJO 17	
	11	18	
19 1 J ARMAS	10	2 J ARMAS 19	
20 1 J DISPARO	9	2 J DISPARO 20	
	8	21	
	7	22	
23 CONTADOR MONEDAS	6	23	
24 + 12 V	5	+ 12 V 24	
25 + 5 V	4	+ 5 V (pulsadores) 25	
26 + 5 V	3	+ 5 V 26	
27 MASA	2	MASA 27	
28 MASA	1	MASA 28	

