1P + 2P = Borrar la memoria (Desde el TEST 1)

UP 1player + XOR = Paso al siguiente test

COMPONENT		SOLDER
GND	1	GND
GND	2	GND
+5V	3	+5V
+5V	4	+5V
(NOT USED)	5	(NOT USED)
+12V	6	+12V
KEY	7	KEY
COIN METER 1	8	COIN METER 2
(NOT USED)	9	(NOT USED)
SPEAKER(+)	10	SPEAKER(-)
(NOT USED)	11	(NOT USED)
RED	12	GREEN
BLUE	13	SYNC
GND	14	(NOT USED)
(NOT USED)	15	(NOT USED)
COIN 1	16	COIN 2
1P START	17	2P START
1P UP	18	2P UP
1P DOWN	19	2P DOWN
1P LEFT	20	2P LEFT
1P RIGHT	21	2P RIGHT
1P XOR	22	2P XOR
1P ROTATE	23	2P ROTATE
(NOT USED)	24	(NOT USED)
(NOT USED)	25	(NOT USED)
(NOT USED)	26	(NOT USED)
GND	27	GND
GND	28	GND

OPTION		1	2	3	4	5	6	7	8
1 COIN 1 CREDIT		OFF	OFF	OFF	NOT USED				
1 COIN 2 CREDITS		ON	OFF	OFF					
1 COIN 3 CREDITS		OFF	ON	OFF					
1 COIN 4 CREDITS		ON	ON	OFF					
1 COIN 5 CREDITS		OFF	OFF	ON					
1 COIN 6 CREDITS		ON	OFF	ON					
2 COINS 1 CREDITS		OFF	ON	ON					
3 COINS 1 CREDITS		ON	ON	ON					
ADVERTISE SOUND	NO					OFF			
	YES					ON			
GAME DIFFICULTY	NORMAL						OFF	OFF	
	EASY						ON	OFF	
	HARD						OFF	ON	
	HARDEST						ON	ON	
TEST	NO								OFF
	YES								ON

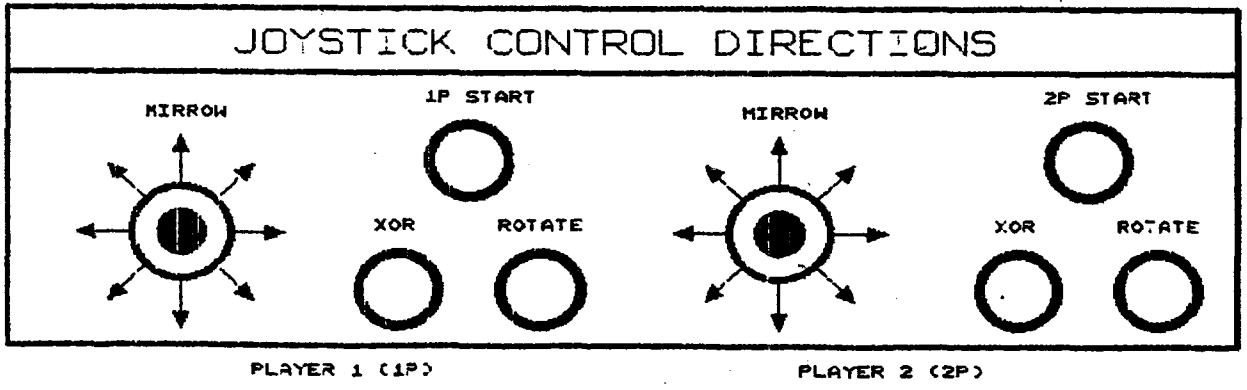

GAELCO S.A.		
Title: XOR WORLD		
Size: A	Document Number: SWITCH AND CONECTION	REV: 1
Date: November 29, 1990	Sheet of	