


BUGGY BOY JUNIOR

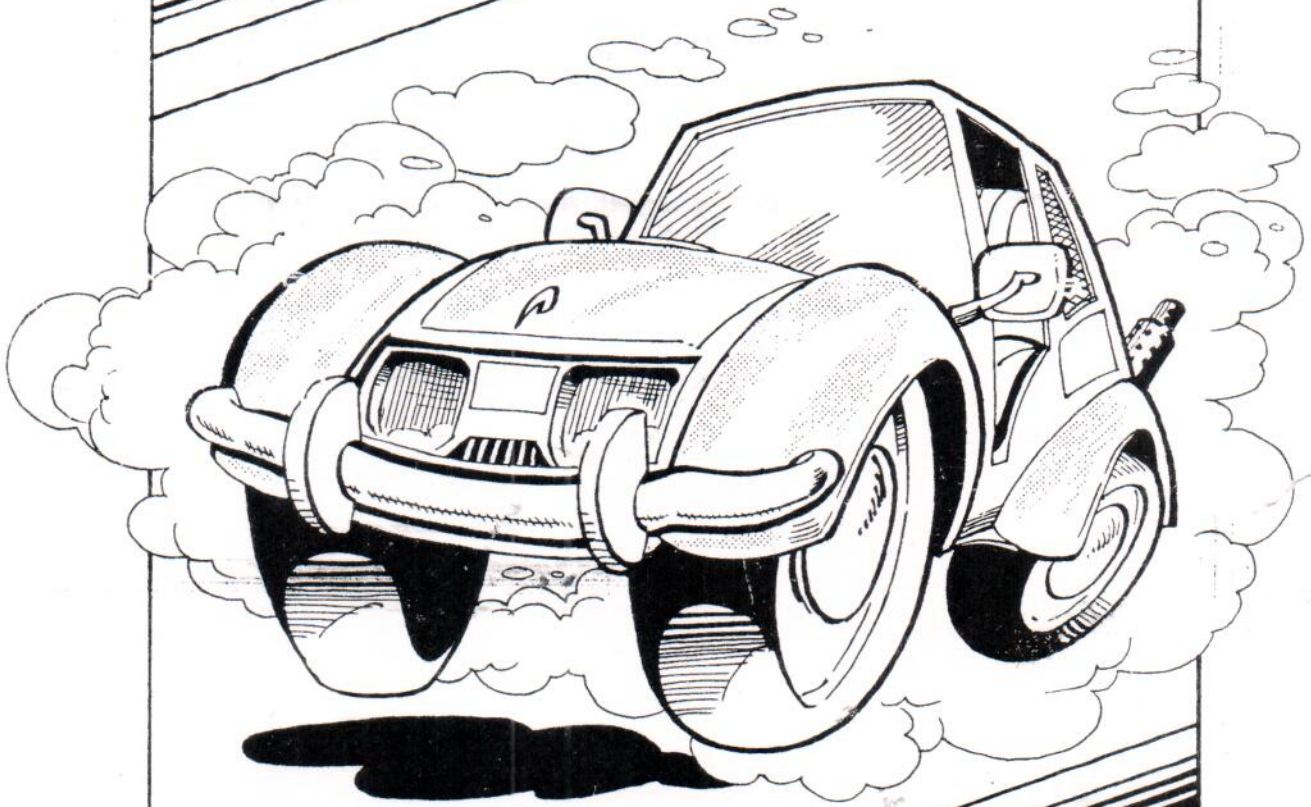

DIP SWITCH 1

0 = ON
1 = OFF

1	2	3	
0	0	0	JUEGO LIBRE
1	0	0	1 MONEDA 2 CREDITO
0	1	0	1 MONEDA 6 CREDITO
1	1	0	2 MONEDA 1 CREDITO
0	0	1	2 MONEDA 3 CREDITO
1	0	1	3 MONEDA 1 CREDITO
0	1	1	1 MONEDA 5 CREDITO
1	1	1	1 MONEDA 1 CREDITO

JUGADOR 1

4	5	6	
0	0	0	1 MONEDA 6 CREDITO
1	0	0	1 MONEDA 5 CREDITO
0	1	0	1 MONEDA 4 CREDITO
1	1	0	2 MONEDA 1 CREDITO
0	0	1	4 MONEDA 1 CREDITO
1	0	1	1 MONEDA 2 CREDITO
0	1	1	1 MONEDA 3 CREDITO
1	1	1	1 MONEDA 1 CREDITO

JUGADOR 2

7	8	
0	0	D
0	1	B
1	0	C
1	1	A

DIFICULTAD

5	6	
0	0	D
0	1	B
1	0	C
1	1	A

TIEMPO

LADO SOLDADURA		LADO COMPONENTES	
MASA	18	1	18+ 5
MASA	17	2	17+ 5
MASA	16	3	16+ 5
MASA	15	4	15+ 5
MASA	14	5	14+ 5
MASA	13	6	13 MONEDERO 1
SERVICIO	12	7	12 CANTIC
TEST	11	8	11 ACELERADOR A
ACELERADOR B	10	9	10
	9	10	9 VOLANTE A
VOLANTE B	8	11	8
	7	12	7
MONEDERO 2	6	13	6+ 5 MONEDERO 2
GND	5	14	5+ 5
AUDIO A MASA	4	15	4 SALIDA AUDIO A AL AMPLIFICADOR B.F.
AUDIO A MASA	3	16	3 " " " " " "
AUDIO B MASA	2	17	2 SALIDA AUDIO B AL AMPLIFICADOR B.F.
AUDIO B MASA	1	18	1 " " " " " "

